SafetyCast[™] 300 Virtual Sign Projector Datasheet



Overview:

The SafetyCast[™] 300 Virtual Walkway Projector are the ideal way to display bright floor and wall safety signs in locations where there is high traffic, potential for a hazard, or uneven floors. The SafetyCast[™] 300 Virtual Walkway Projector uses an image lens and a high-output LED bulb to project a clear sign at distances of up to 70 m (230'). The SafetyCast[™] 300 Virtual Walkway Projector works well in almost all lighting conditions and is easy to mount and adjust. Once installed, there's virtually no maintenance, and you won't need to worry about replacing damaged signs on your floors or walls.

Key Features:

- Customizable A large variety of safety signages and custom signs.
- · Cost Effective Minimal maintenance eliminates the need for repainting or retaping
- · Ultra Visible Powerful close-range and long-range projection, high-contrast image projection
- Smart Triggered Optional capability to trigger signage using motion sensors, beam break sensors or push button
- Adjustable Focus


Specifications:

Lamp Details			
Type of Light Source: Rated Power:	High Performance LED		
	300 W		
Light Source Life (MTTF):	30,000 hours at 25°C/77°F		
Optical			
Light Colour Temperature:	6,000 K		
Luminous Flux:	30,000 lm		
Projection Distance:	Up to 45 ft (15 m)		

Temperature Range (°C): Relative humidity: Projector Power: Power Supply: IP Rating:	-20 to 50°C (-4 to 122 °F) 5% to 80% noncondensing 300W 100-240 VAC nominal, 50/60 Hz, 2.5A, 300W IP65
Standard Warranty:	12 months
Smart Triggered Projection:	Projection flashing using either Motion Sensors or Break of Beam sensors
Accessories included:	Mounting Bracket, Power supply

SafetyCast[™] 300 Virtual Sign Projector

Projector and Power Supply Dimensions:

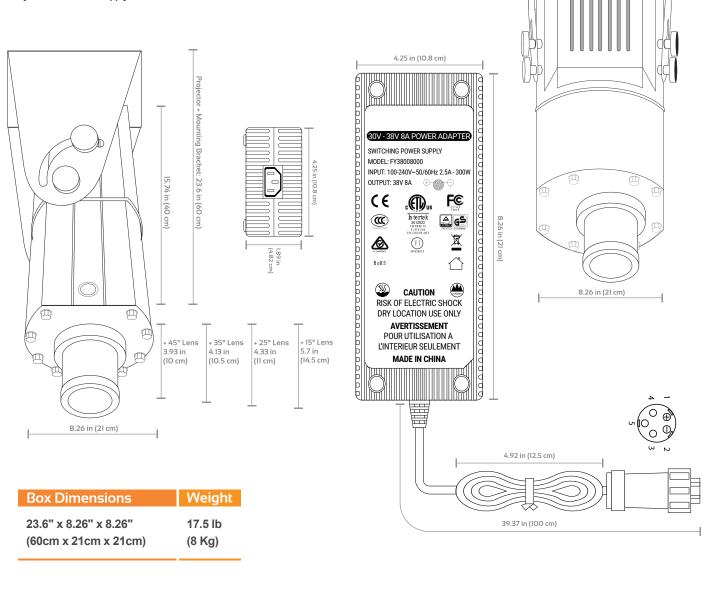

Accessories:

The most popular accessories for this model are shown here.

For additional details regarding these or other accessories please see our website or contact us directly.

Product SKU		Description	Product SKU		Description
00	ABM088CXX	No Drill Magnetic Mounts	STOP	AOGXXX	Image Template
	AOO30015T	• Focusing Lens (F = Narrow Angle) 300 W		AOGCUS8XX	Custom Image Template
0	AOO30025T	• Focusing Lens (H = Medium Angle) 300 W			

E&OE: Data included in this sheet may be subject to change without notice. Please confirm critical specifications with our staff prior to ordering.